

APPROVAL SHEET

AOT MODEL NAME	3030UVC
AOT PART NUMBER	3030UVC
CUSTOMER NAME	General Customer
DATE	2021/07
VERSION	01

MAKER			CUSTOMER			
Prepared	Checked	Approved				



TENTATIVE

AOT Headquarters
No. 13, Gongye 5th. Road, Hsinchu Industrial Park, Hukou Shiang,
Hsinchu Hsien 303, Taiwan, R.O.C.
TEL: +886-3-597-6988 / FAX: +886-3-598-7392

Package Outline

Model name:3030UVC

Unit: mm, Tolerance: ± 0.2 mm

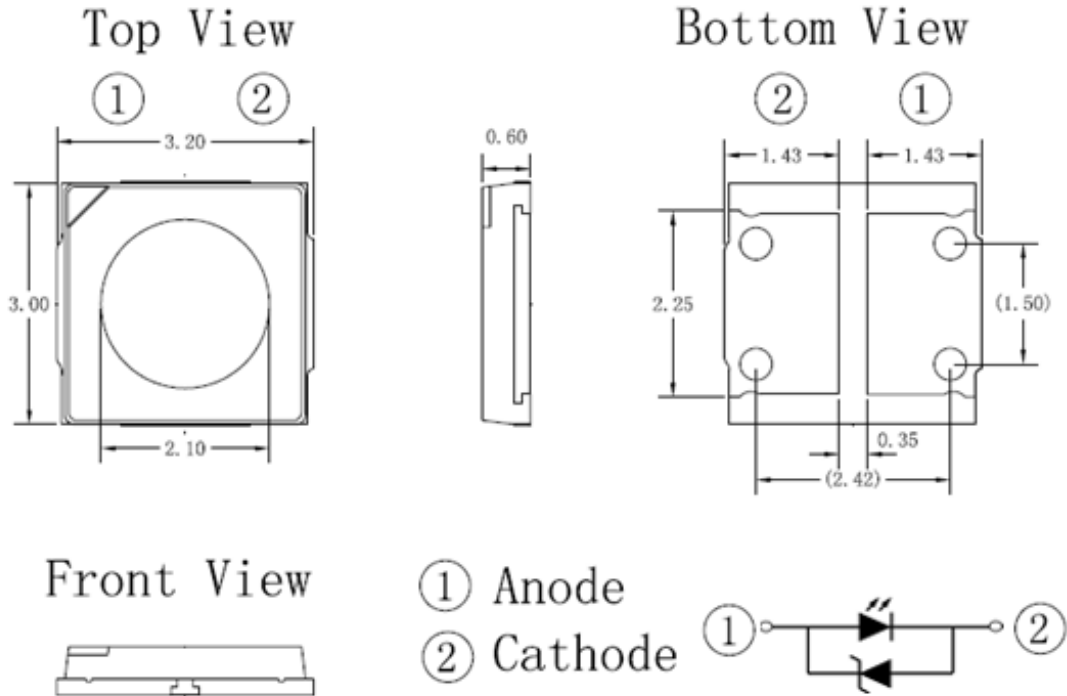

Item	Materials
Package	Heat-Resistant Polymer
Encapsulating	Anti-UV Resin
Electrode	Ag Plating Copper Alloy

- Single UVC chip.
- High brightness SMD.
- Compact package outline (LxWxH) of 3.0 mm x 3.0 mm x 0.6 mm.
- Compatible with reflow soldering.
- Complies with RoHS Directive.

Optical/Electronic Characteristics (Ts=25°C)

AOT Reading Standards						
Item	Symbol	Condition	Min	Typ.	Max	Unit
Forward Voltage	V_F	$I_F = 60\text{mA}$	5.0	-	8.0	V
Luminous Flux	Φ_v	$I_F = 60\text{mA}$	3.0	-	7.0	mW
Viewing Angle	$2\theta_{1/2}$	$I_F = 60\text{mA}$		120		deg
Thermal Resistance	$R_{\text{ths-j}}$	$I_F = 60\text{mA}$			30 ($T_s=70^\circ\text{C}$)	K/W

* Tolerance of measurements of the Forward Voltage is ± 0.5 V.

* Tolerance of measurements of the Luminous Flux is $\pm 15\%$.

* Viewing angle($2\theta_{1/2}$) $\pm 10^\circ$

Absolute Maximum Ratings (Ts=25°C)

Item	Symbol	Absolute Maximum Rating	Unit
Forward Current	I_F	60	mA
Operating Temperature	T_{opr}	-30~+85 ($I_F=60\text{mA}$)	$^\circ\text{C}$
Storage Temperature	T_{stg}	-40~+80	$^\circ\text{C}$
Soldering Temperature	T_{slid}	Reflow Soldering : 215 $^\circ\text{C}$ for 10sec Hand Soldering : 215 $^\circ\text{C}$ for 3sec	
Junction Temperature	T_j	70	$^\circ\text{C}$

* IFP Conditions : Pulse Width $\leq 10\text{msec}$, and duty $\leq 1/10$

* Max condition is not guarantee for life time

* $T_s(\text{max})=70^\circ\text{C}$

Group Definition of Forward Voltage

Rank	Condition	V _F (V)
S82	T _s =25°C I _F =60mA	5.0 ~ 6.0
S83		6.0 ~ 7.0
S84		7.0 ~ 8.0

Group Definition of Brightness

Rank	Condition	AOT Luminous Flux(lm)
T3	T _s =25°C I _F =60mA	3.0 ~ 5.0
T5		5.0 ~ 7.0

Group Definition of Wavelength


Rank	Condition	Wavelength Peak(nm)
UVC	T _s =25°C I _F =60mA	270 ~ 285

*A shipment shall consist of LEDs in a combination of above ranks.

The percentage of each rank in the shipment shall be determined by AOT.

*The ranking information of LEDs can be found on the reel label.

Radiation Pattern(T_A=25°C,I_{FP}=60mA)

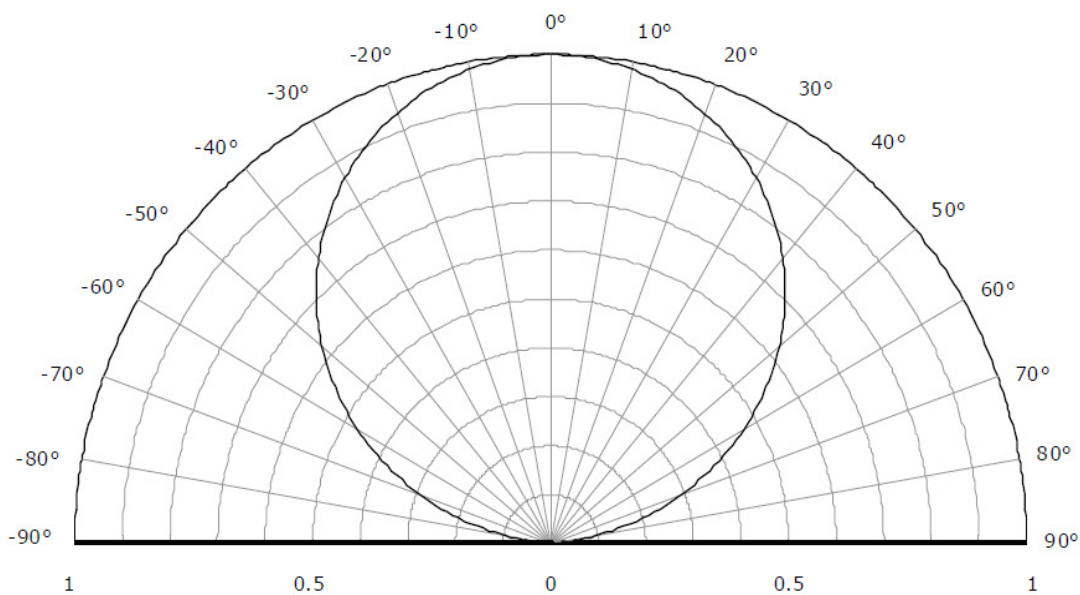

TENTATIVE

Recommended Reflow Soldering Conditions


Surface Mounting Condition

In automatic mounting of the SMD LEDs on printed circuit boards, any bending, expanding and pulling forces or shock against the SMD LEDs should be kept min. to prevent them from electrical failures and mechanical damages of the devices.

Soldering Reflow

- Soldering of the SMD LEDs should conform to the soldering condition in the individual specifications.
- SMD LEDs are designed for Reflow Soldering.
- In the reflow soldering, too high temperature and too large temperature gradient such as rapid heating/cooling may cause electrical & optical failures and damages of the devices.
- AOT cannot guarantee the LEDs after they have been assembled using the solder dipping method.

(1) SMT Profile

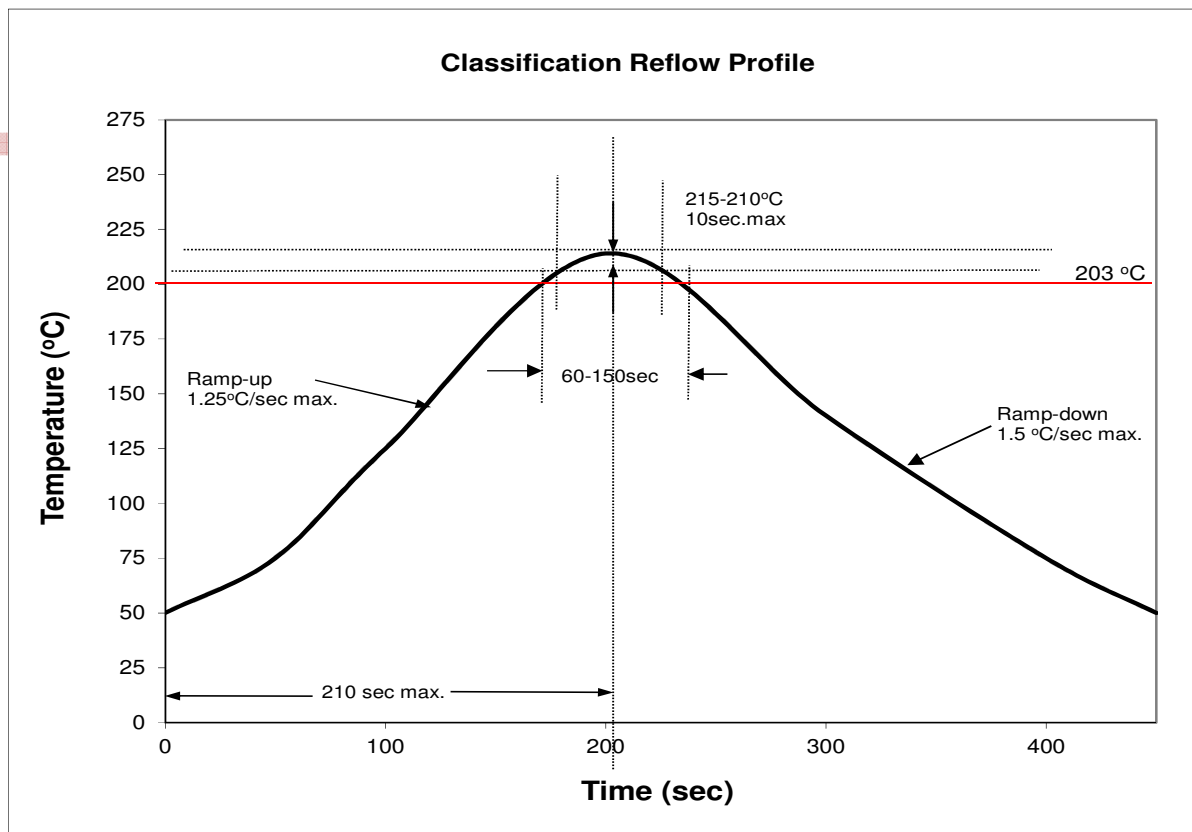


(2) Manual Soldering Conditions

Use Low Temperature, 215°C for max. 3sec, and only one time

- There is possibility that the brightness of LEDs is decreased, which is influenced by heat or ambient atmosphere during reflow. It is recommended to use the nitrogen reflow method.
- After LEDs have been soldered, repair should not be done. As repair is unavoidable, a double-head soldering iron should be used. It should be confirmed beforehand whether the characteristics of the LEDs will be damaged by repairing or not.
- Reflow soldering should not be done more than two times.


TENTATIVE

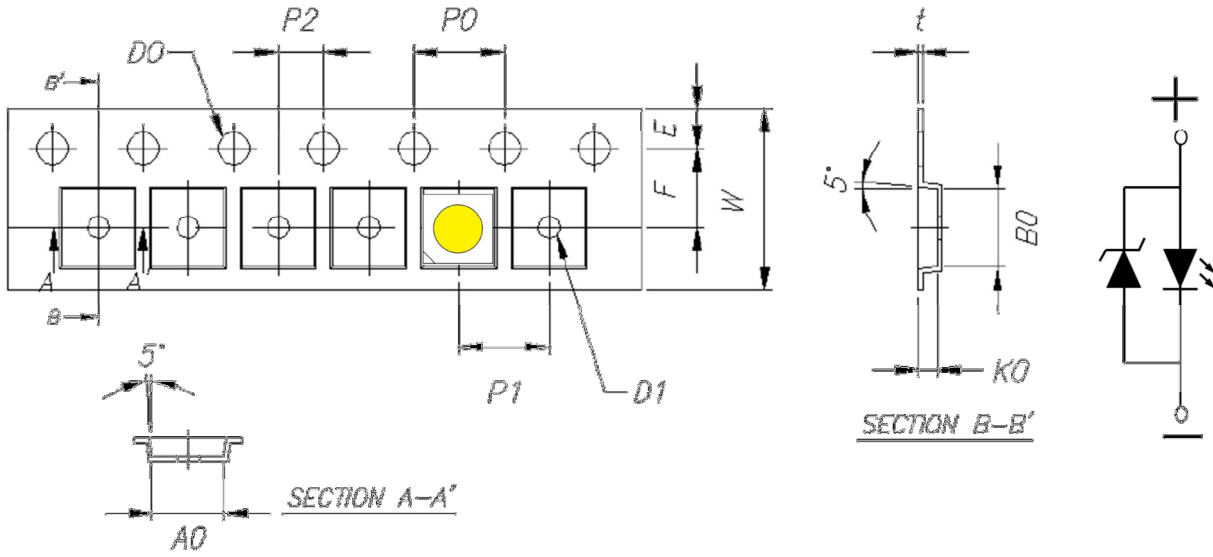

Item	Spec.	Tolerance(mm)	Item	Spec.	Tolerance(mm)
W	8.00	±0.20	P1	4.00	±0.10
E1	1.75	±0.10	P2	2.00	±0.05
F	3.50	±0.05	t	0.2	±0.05
D0	1.50	+0.10	A0	3.2	±0.1
D1	1.0	±0.1	B0	3.45	±0.1
P0	4.00	±0.05	K0	0.83	±0.1

Packing Formation

TENTATIVE
暫行版產品規格書




Diameter : 178 mm

Width : 8mm


3,500 pcs/Reel

Antistatic Black Reel

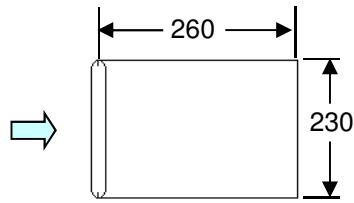



Antistatic Shielding Aluminum Bag

1 Reel / Bag




5 Bags / 1 Inner Box

17,500 pcs/ 1 Inner Box

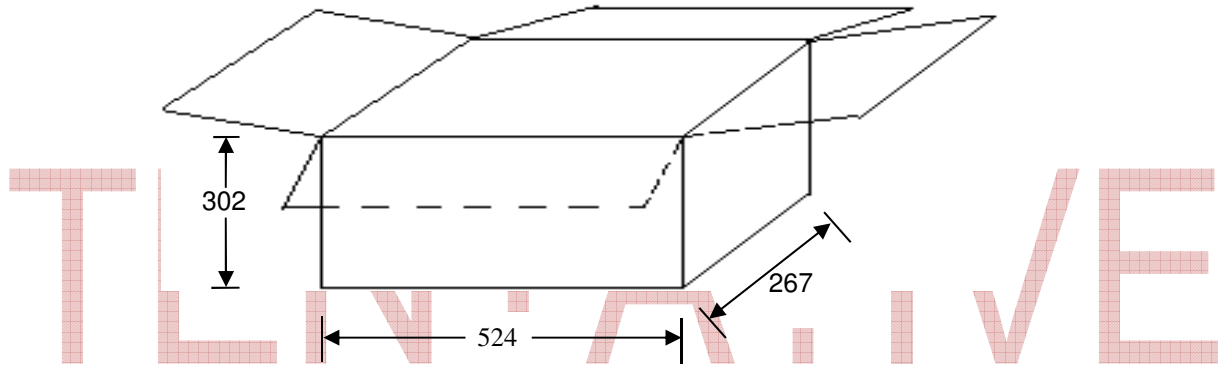

Package Outlook

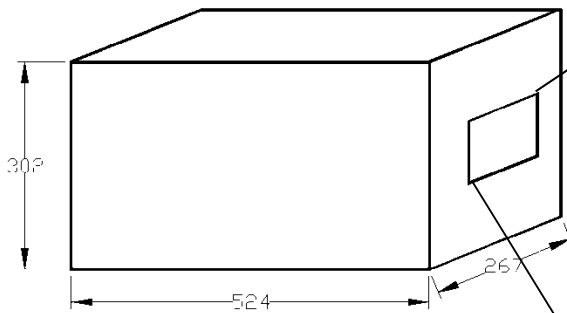

 Solid-State Light. Done Right. Advanced Optoelectronic Technology Inc.	
Customer	
PO No.	
Part No.	
Quantity	
Packing Date	
Carton No.	
Ship No.	
QC Check	 
備註	

Moisture Level(MSL Level)

MSL label is attached on the Aluminum bag and Reel




Moisture Level(MSL Level)

Silica gel is enclosed in the Aluminum bag. (Size : 8 cm x 5 cm / Weight : 8 gr.)



Moisture Level(MSL Level)

Humidity indicator is enclosed in the Aluminum bag. (Size : 8 cm x 9 cm)

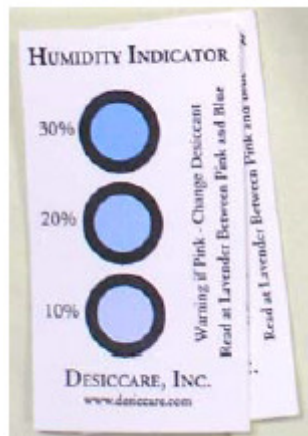

Reel Label Definition

Model Name : 3030S-XXXX
 Brightness : A
 CIE : B
 VF : C
 WP : D
 Qty : nn
 Serial No : xyymmddAxxx
 Cust PN : XXXXXXXXXXXXX




3030S2%XXX%A*B*C*D%nn%yymmdd



- A : Iv value.
- B : CIE value noted
- C : Vf value.
- D : Wp Value.
- nn : Quantity of LED
- Serial No.definition :

x	yy	mm	dd	A	xxx
Factory→	Year	month	day	Real Type	Serial Number
A : HK	(last 2 digits)				
C : SW					

*Reel Label to fill in practice data of all LED characteristic

CAUTIONS

(1) Moisture Proof Package

The moisture proof package should be used to prevent moisture in the package as the moisture may Cause damage to optical characteristics of the LEDs.

The aluminum bag with zipper is used for moisture proof package. And, the moisture absorbent Material, Silica gel, is inserted into aluminum bag.

(2) Storage:

Storage Conditions

Before opening the package:

The LEDs should be kept at 30°C or less than 90%RH or less. The LEDs should be used within a year. When storing the LEDs, moisture proof packaging with absorbent material is recommended.

After opening the package:

After open the package, the LED should be kept at 30°C, 60%RH or less. The LED should be soldered within 4 weeks after opening the package. If unused LEDs remain, it should be stored in moisture proof condition.

(3) Heat Generation

Thermal design of the end products is of paramount importance. The heat generation must be taken into design consideration when using the LED. The coefficient of the temperature increase per input electric power is affected by the thermal resistance of the circuit board and density of LED placement on the board, as well as other components.

(4) Static Electricity

Static electricity or surge voltage damages the LEDs. All equipment and machinery must be properly grounded. It is recommended to use a wristband or anti-electrostatic glove when handling the LEDs.

When inspecting the final products in which LEDs were assembled, it is recommended to check whether the assembled LEDs are damaged by static electricity or not. It is easy to find static-damaged LEDs by a light-on test or a Vf test at a lower current. (Below 1mA is recommended).

Criteria: $V_f > 1.95V$ at $I_f = 1\mu A$

(5) Cleaning

Use isopropyl alcohol as a solvent for cleaning the LEDs. The other solvent may dissolve the LEDs package and the epoxy.

Ultrasonic cleaning should not be done.

(6) Electrostatic Discharge (ESD)

The products are sensitive to static electricity or surge voltage, An ESD event may damage its die or reduce its reliability performance. When handling the products, measures against electro static discharge, including the followings, are strongly recommended.

Eliminating the charge;

Wrist strap, ESD footwear and garments, ESD floors

Grounding the equipment and tools at workstation

ESD table / shelf mat (conductive materials)

Proper grounding techniques are required for all devices, equipment and machinery used in the assembly of the products, Also note that surge protection should be considered in the design of customer products.

If tools or equipment contain insulating materials, such as glass or plastic, proper measures against electro static discharge, including the followings are strongly recommended.

Dissipating the charge with conductive materials

Preventing the charge generation with moisture

Neutralizing the charge with ionizer

(7) Others

When using the LEDs, it must care that the reverse voltage will not exceed the absolute maximum rating.

The LED light is enough to injure human eyes, so it should avoid looking at LED light directly.

NOTE.

All the information published is considered to be reliable. However, AOT does not assume any liability arising out of the application or use of any product described herein.

AOT reserves the right to make changes at any time without notice to any products in order to improve reliability, function or design.

AOT products are not authorized for use as critical components in life support devices or systems without the express written approval from the managing director of AOT.